




1. DO NOT plug in the Easi-Speak Pro until later
2. Download the file firmware.zip from the website and extract all the files into a new folder on your desktop called **Firmware**. In this folder you should now have four files:
 IAP_Setup.exe
 icon.res
 ReadMe.pdf (this file)
 TriSoftWare2k.dat
3. Run IAP_Setup.exe to install the upgrade utility program. Follow the instructions on the installation program
4. After installation, run the IAP upgrade utility: Select IAP_33XX from the IAP folder in the start menu

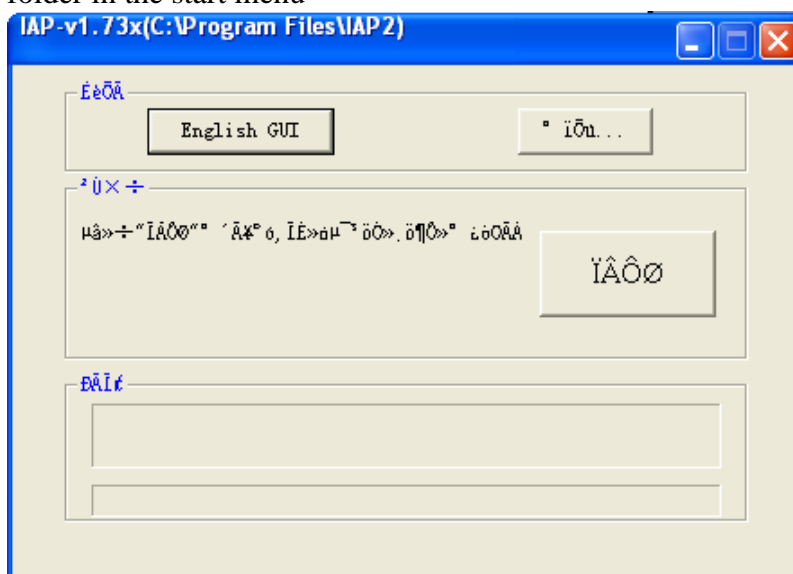


5. If the top left button says "English GUI", then press this button to select English. Note that this will leave the button you have just pressed with gibberish (or Chinese if you have Chinese fonts installed), see below.

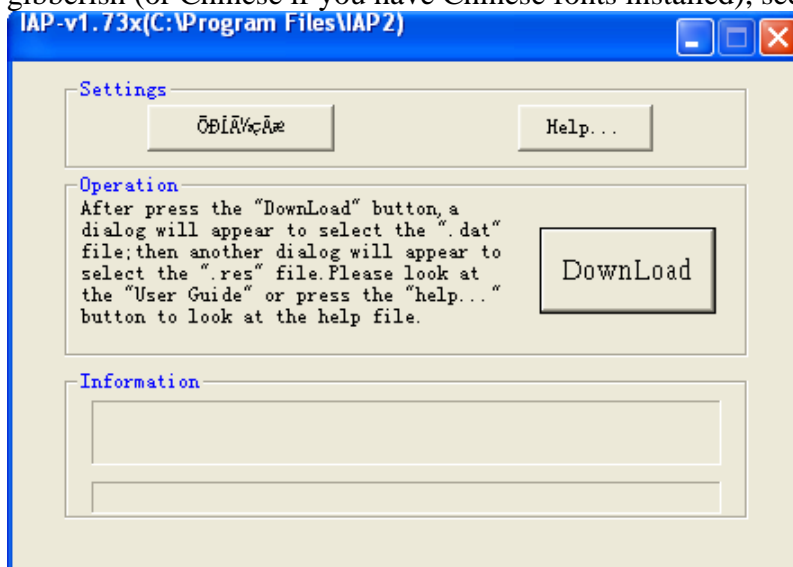


6. Press the "Download" button
7. Browse to the "Firmware" folder that you created in step 2, then select TrioSoftware2K.dat. The screen should appear like the image below.

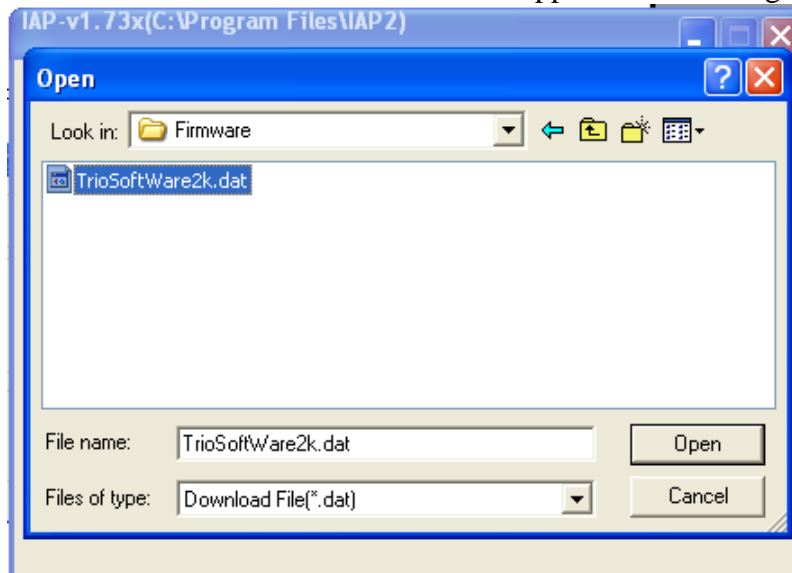


8. Then select icon.res from the same folder.

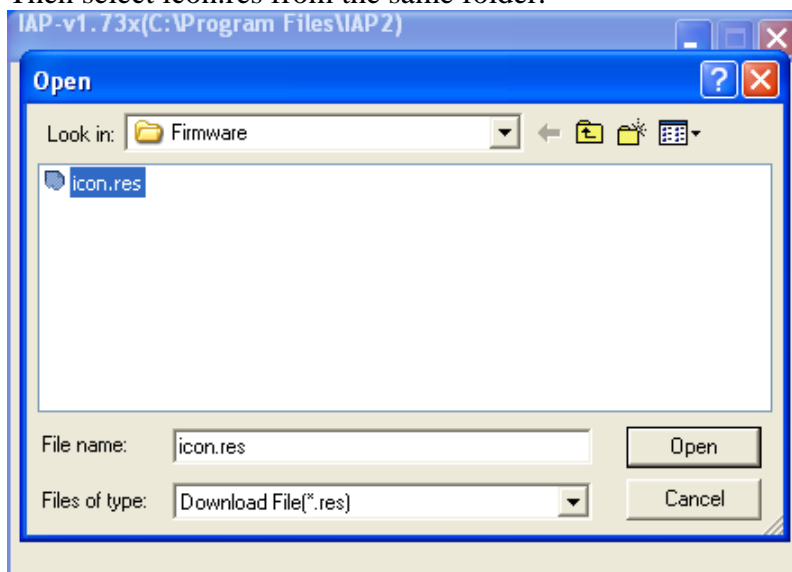

9. After selecting “icon.res”, the status display will change to "Installing driver.."

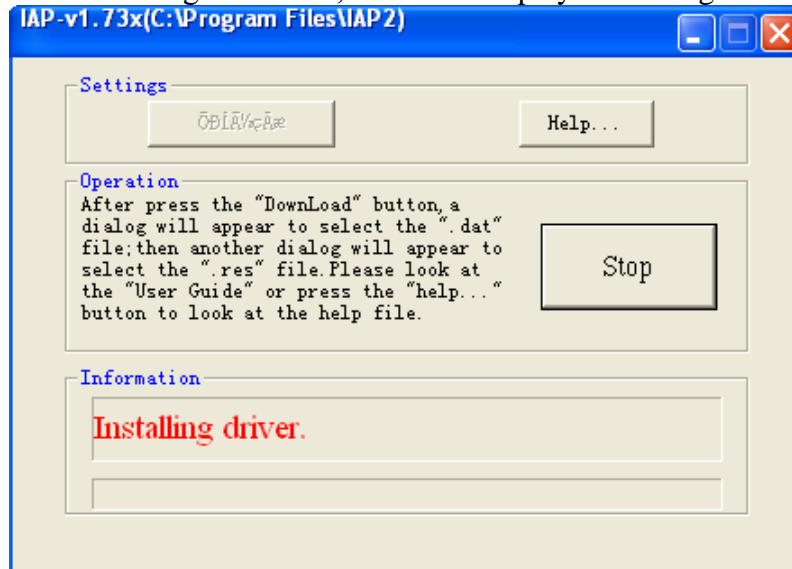


10. After a few seconds, the display will change to "Connecting..."

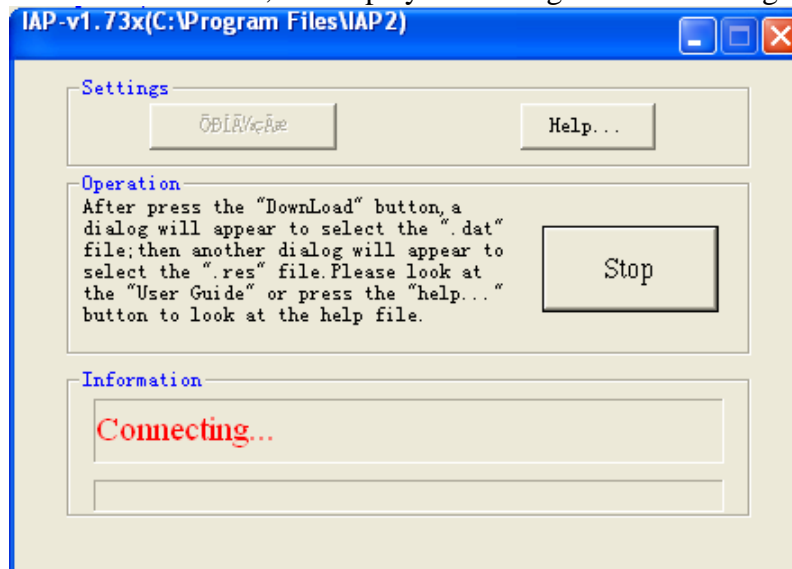


11. Now, while the display is showing “Connecting...”, ensure that the Easi-Speak Pro is switched OFF, then plug it into the PC USB port. The IAP program is waiting for the Easi-Speak Pro to be plugged in.

12. After the Easi-Speak Pro is plugged in, the display will change to "Downloading...", then to "Download completed!"

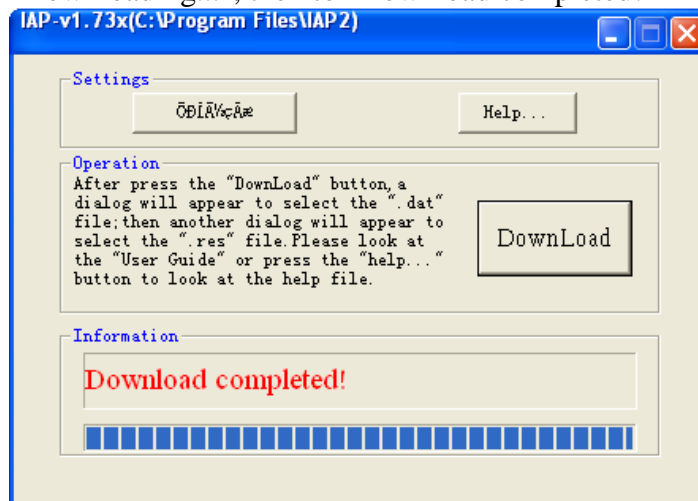

13. Now unplug the Easi-Speak Pro and switch it on. It will now be upgraded to the latest version of firmware
14. Plug the Easi-Speak Pro back into the PC, right-click, select Format and the FAT option on "File system"

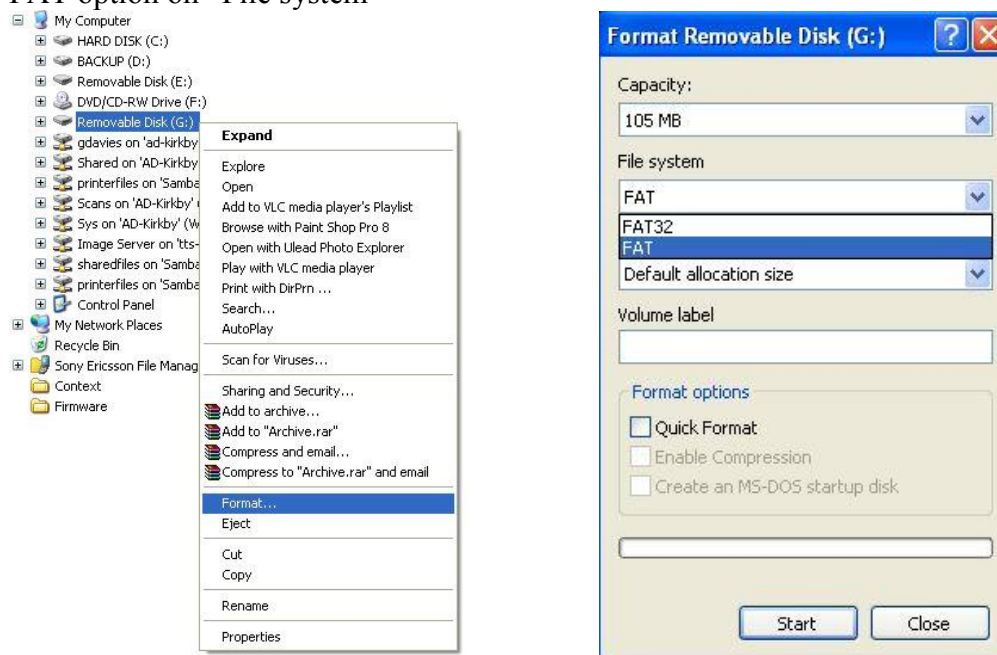

15. The click on "Start", then "OK"
16. When formatting is complete, you may remove the Easi-Speak Pro from the PC
17. You can confirm the version of firmware installed by:
- Remove the Easi-Speak Pro from the PC and switch it ON
 - Re-connect the Easi-Speak Pro to the PC and open the newly created file `SOFT_VER.TXT`
 - It should show:
FirmWare : V03.41 Update : 2010-02-05